

DS-3E0310HP-E
8-Port 100 Mbps Long-Range Unmanaged PoE Switch

104-982

DS-3E0310HP-E switches are layer 2 100 Mbps long-range PoE switches, providing 1 × 10/100 Mbps Hi-PoE port, 7 × 10/100 Mbps PoE ports, and 2 × 10/100/1000 Mbps RJ45 ports. The switches provide advanced Hi-PoE/PoE technology and supports extend mode with long-range access up to 300 m. Meanwhile, the 2 × 10/100/1000 Mbps RJ45 uplink ports guarantee applications of multiple network solutions.



Feature and Function

Intelligent PoE Management.

- When the power supply exceeds the limit, PoE ports intelligently manage the power supply, which extends the switch lifetime.

Up to 300 m Long Range PoE Transmission.

- The distance between IPCs and switch can reach maximum 300 meters.

IEEE 802.3bt Standard Hi-PoE, Max. 90 W for One Port.

- IEEE 802.3bt standard Hi-PoE port provides max. 90 W power supply for high power devices such as domes or other 802.3bt devices.

4/8-Core Adaptive Power Supply with Less Power Loss.

- 8-core power supply reduces the power loss on cables.

6KV Surge Protection to Improve Reliability in Harsh Environment.


- The built-in surge protection device protects the switch from the sudden lightning surge in harsh environment.

Specification

Model		DS-3E0310HP-E
Network parameters	Port number	1 × 10/100 Mbps Hi-PoE port, 7 × 10/100 Mbps PoE ports, and 2 × 10/100/1000 Mbps RJ45 ports
	Port type	RJ45 port, full duplex, MDI/MDI-X adaptive
	Standard	IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3ab, and IEEE 802.3z
	Forwarding mode	Store-and-forward switching
	Working mode	Standard mode (default); Extend mode
	Ports for long-distance transmission	Ports 1 to 8
	MAC address table	16 K
	Switching capacity	5.6 Gbps
	Packet forwarding rate	4.166 Mpps
	Internal cache	4 Mbits
PoE power supply	PoE standard	Port 1: IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt Ports 2 to 8: IEEE 802.3af, IEEE 802.3at
	PoE power pin	Support 8-core power supply, Ethernet cable 1/2/3/6 and 4/5/7/8 provide power supply simultaneously.
	PoE port	Ports 1 to 8
	Max. port power	Port 1: 90 W Ports 2 to 8: 30 W
	PoE power budget	110 W
	Max. power consumption	120 W
General	Shell	Metal material, fan-free design
	Gross weight	1.22 kg (2.69 lb)
	Net weight	0.55 kg (1.21 lb)
	Dimension (L × H × D)	217.6 mm × 27.8 mm × 103.35 mm (8.6" × 1.1" × 4.1")
	Operating temperature	-10 °C to 55 °C (14 °F to 131 °F)
	Storage temperature	-40 °C to 85 °C (-40 °F to 185 °F)
	Operating humidity	5% to 95% (no condensation)
	Storage humidity	5% to 95% (no condensation)
	Power supply	48 VDC, 2.5 A
Power consumption in idle	10 W	
Approval	EMC	FCC (47 CFR Part 15, Subpart B); CE-EMC (EN 55032: 2015, EN 61000-3-2: 2014, EN 61000-3-3: 2013, EN 55024: 2010 +A1: 2015); RCM (AS/NZS CISPR 32: 2015); IC (ICES-003: Issue 6, 2016)
	Safety	UL (UL 60950-1); CB (IEC 60950-1:2005 + Am 1:2009 + Am 2:2013); CE-LVD (EN 60950-1:2005 + Am 1:2009 + Am 2:2013)
	Chemistry	CE-RoHS (2011/65/EU); WEEE (2012/19/EU); Reach (Regulation (EC) No 1907/2006)

Physical Interface

Front panel:

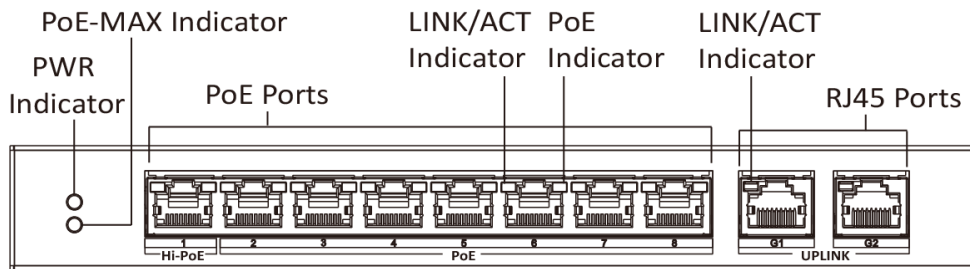

Back panel:




Dimension (unit: mm)



Typical Application

— Data

— Power+Data(PoE)

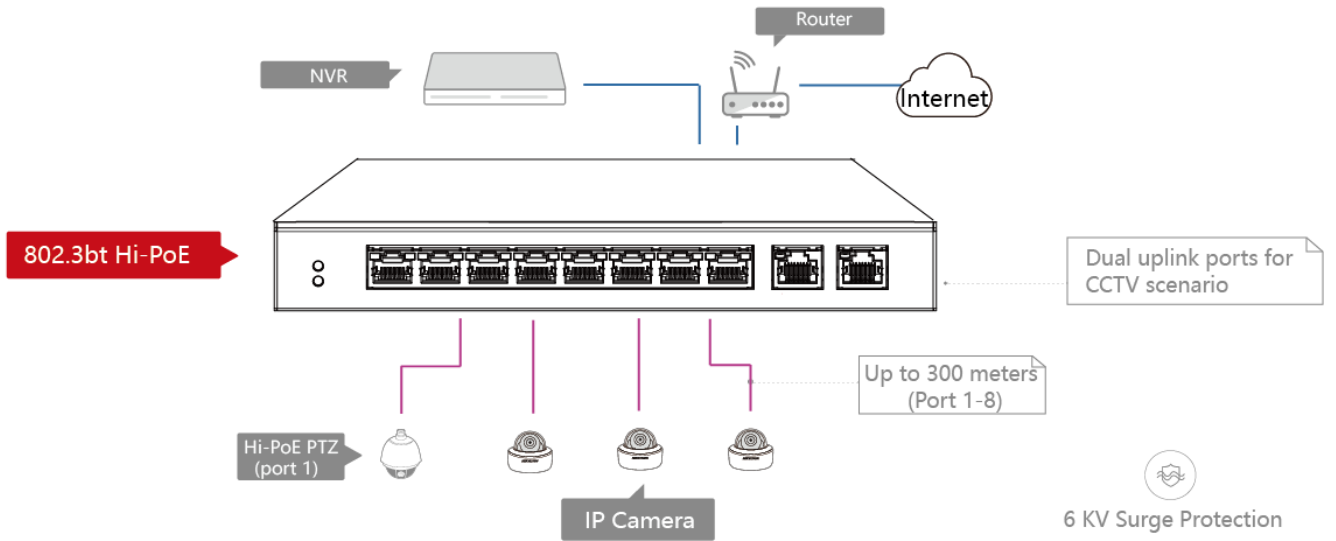

ORDERING INFORMATION

104-982

Hikvision DS-3E0310HP-E



Innovative Electronic Solutions
www.ness.com.au



NSW Ph 02 8825 9222
sales@ness.com.au

VIC Ph 03 9875 6400
nessmelb@ness.com.au

QLD Ph 07 3399 4910
nessbris@ness.com.au

WA Ph 08 9328 2511
nessper@ness.com.au

SA Ph 08 8152 0000
adelaide@ness.com.au