


DS-KD8003Y-IME2
Two Wire Main Unit

114-651



- Modular door station main unit, needs mounting bracket
- 2MP HD Camera, fish eye, IR supplement
- 1 call physical button, 2 lock relays, 4-ch alarm input
- Video intercom to indoor station and master station
- WEB configuration
- Power output for electronic lock, max to 12 VDC, 500 mA

▪ **Dimension**

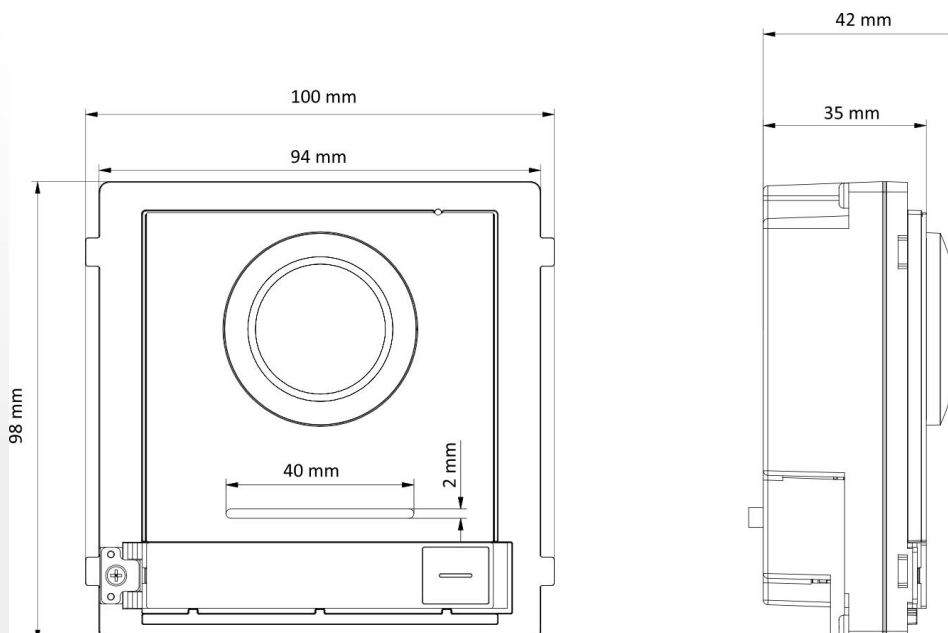

▪ Specification

System parameters	
Operating system	Embedded Linux operation system
ROM	32 MB
RAM	256 MB
CPU	Embedded Processor
Display parameters	
Screen size	NA
Operation method	NA
Type	NA
Resolution	NA
Video parameters	
Video standard	H.264
Supplement light	Low illumination, IR supplement lights
Lens	1
FOV	Horizontal: 146°, Vertical: 82°
WDR	Support
Resolution	2 MP
Audio parameters	
Audio compression standard	G.711 U, G.711 A
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Fingerprint capacity	/
User capacity	2000
Face capacity	NA
Linked indoor station capacity	500
Event capacity	/
Sub door station capacity	16
Network parameters	
Communication protocol	NA
Wired network	NA
Wi-Fi	NA
Bluetooth	NA
3G/4G	NA
Device interfaces	
Alarm input	4 (2 exit buttons and 2 door contacts by default)
Network interface	NA
TAMPER	1
Exit button	2 (2 for lock control)
Door contact input	2
RS-485	1 (1 for Hikvision's sub module communication)

Wiegand	NA
TF card	NA
Alarm output	NA
Lock control	2 (2 relay, max to 30 VDC, 2 A)
USB	NA
Power interface	12VDC power output (12 V, 500 mA Max.)
Two-wire IP interface	1
General	
Button	1
Installation	Surface mounting & flush mounting
Indicator	0
Weight	373.5 g
Protective level	IP65
Working temperature	-40° C to 60° C (-22° F to 140° F)
Working humidity	10% to 90%
Dimensions	100 mm × 98 mm × 42 mm
Battery	/
Power supply	Powered by KAD704Y or KAD706Y series distributor
Application environment	Outdoor
Power consumption	≤ 4 W
Language	English,French,Portuguese,BrazilianPortuguese,Spanish,Russian,German,Italian,Polish, Turkish,Vietnamese,Arabic,Czech,Hungarian,Dutch,Romanian,Bulgarian,Ukrainian,Croatian,Serbian,Greek,Slovak

ORDERING INFORMATION

114-651

Hikvision DS-KD8003Y-IME2 2-Wire Door Station



Innovative Electronic Solutions
www.ness.com.au



NSW Ph 02 8825 9222
sales@ness.com.au

VIC Ph 03 9875 6400
nessmelb@ness.com.au

QLD Ph 07 3399 4910
nessbris@ness.com.au

WA Ph 08 9328 2511
nessper@ness.com.au

SA Ph 08 8152 0000
adelaide@ness.com.au