



**D8x D16x DELUXE**



# NAVIGATOR

Touch Screen Keypad

USER'S MANUAL  
for Navigator Touch Screen Keypads

D8x/D16x Deluxe  
Hardware & Firmware v8.0  
Document 890-020

Rev 1.2

www.ness.com.au

National Customer Service Centre  
Ph: 1300 551 991  
customerservice@ness.com.au



## D8X/D16X DELUXE USER'S MANUAL FOR NAVIGATOR KEYPADS

Document Part No: 890-020

Rev 1.2 Apr 2020

For use with Ness D8x/D16x DELUXE control panels V8.0 and later.

This manual can also be used for previous versions of D8x/D16x panels however some of the programming options covered are available only in V8.0 and later. Refer to user manual 890-016 for LCD keypad operation

### WARNINGS & NOTICES

Ness Corporation manufacturing processes are accredited to ISO9001 quality standards and all possible care and diligence has been applied during manufacture to ensure the reliable operation of this product. However there are various external factors that may impede or restrict the operation of this product in accordance with the product's specification.

These factors include, but are not limited to:

1. Erratic or reduced radio range (if radio accessories are installed). Ness radio products are sophisticated low power devices, however the presence of in-band radio signals, high power transmissions or interference caused by electrical appliances such as Mains Inverters, Wireless Routers, Cordless Phones, Computers, TVs and other electronic devices may reduce radio range performance. While such occurrences are unusual, they are possible. In this case it may be necessary to either increase the physical separation between the Ness receiver and other devices or if possible change the radio frequency or channel of the other devices.
2. Unauthorised tampering, physical damage, electrical interruptions such as mains failure, electrical spikes or lightning.
3. Solar power inverters are a known source of electrical interference. Please ensure that this product and all associated cabling is installed at least 3 metres away from a solar power inverter and its cabling.

**WARNING:** Installation and maintenance to be performed only by qualified service personnel.

**CAUTION:** Risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries in accordance with local regulations.

**ADSL NOTICE:** ADSL broadband data can interfere with the operation of your alarm dialler. It is recommended that a quality ADSL filter be installed as per the filter manufacturer's guidelines in premises with an alarm dialler installed.

### COPYRIGHT NOTICE

All rights reserved. No part of this publication may be reproduced, transmitted or stored in a retrieval system in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of Ness.

Ness reserves the right to make changes to features and specifications at any time without prior notification in the interest of ongoing product development and improvement.

© 2020 Ness Corporation Pty Ltd ABN 28 069 984 372

# Contents

Introduction . . . . .	4
Navigator System overview . . . . .	5
Navigator Touch Screen Keypad overview . . . . .	6
Information Screen . . . . .	7
Care & Cleaning . . . . .	8
Applying the Protective Film . . . . .	9
Zone Status Display . . . . .	10
Clock Display . . . . .	11
System Alarm Displays . . . . .	12, 13
Arming the System . . . . .	14
Disarming the System . . . . .	15
Home Mode . . . . .	16
Duress Alarm . . . . .	17
Emergency Alarms . . . . .	18
Excluding Zones . . . . .	19
Event Memory . . . . .	20
Day Mode Setup . . . . .	21
Day Mode Operation . . . . .	22
Auto Time Automation . . . . .	23
Auxiliary Outputs, Manual Operation . . . . .	24
Programming . . . . .	25
How to enter program mode . . . . .	26
Set Brightness, Set Volume . . . . .	27
Edit Zone Names, Edit AUX Output Names . . . . .	28
Zone Name Library . . . . .	29
Setting the Real Time Clock . . . . .	30
User Codes Options Table . . . . .	31
User Codes Programming . . . . .	32
Radio Keys Programming . . . . .	33
Timer Programming, Entry/Exit Delays . . . . .	34
Follow Me Telephone Number Programming . . . . .	35
Monitoring Operation . . . . .	36
Remote Operation by Telephone . . . . .	37,38
Troubleshooting . . . . .	39
Installation Record . . . . .	40

# Introduction

---

The Ness Navigator is a revolutionary touch screen interface for use with the Ness D8x/D16x<sup>1</sup> series alarm control panels.

Navigator has a large touch sensitive 3.5" colour LCD which is easy to read, easy to use and makes operating your Ness alarm system a real pleasure.

The large colour screen means Navigator can tell you much more than a conventional keypad can.

Zone descriptions are displayed in plain English and you can even edit zone

names yourself to reflect the names of rooms in your own premises.

Not only does Navigator provide valuable information about your Ness alarm system, it allows you to arm and disarm your system, tells you what the system is doing, you can use it to program alarm system and if that's not enough - Navigator just looks great!



<sup>1</sup> Navigator Touch Screen Keypad is compatible with Ness D8x and D16x control panels Version 7 and later.


# Your Navigator System

## Your Ness Alarm System

Ness Navigator Touch Screen Keypad is the face of your Ness D8x or D16x Navigator Alarm System.

Navigator's self-explanatory operation guides provide you with plain English displays and intuitive touch screen operation.

The interactive display screens make it easy to view all your zones with your own text descriptions, get help and prompts for arming, disarming, operating outputs, emergency alarms and more.

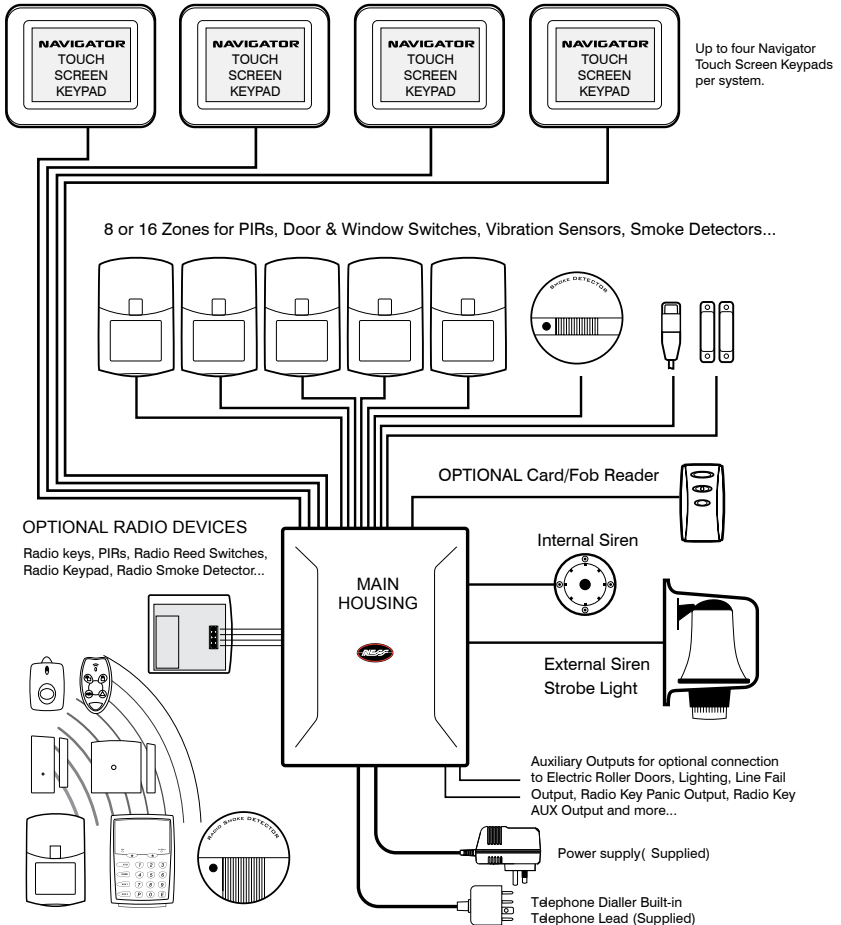


# Overview

---


## The Disarmed Screen

In the normal disarmed mode, the Navigator screen displays information about the state of your system and gives you instant access to commonly used functions.

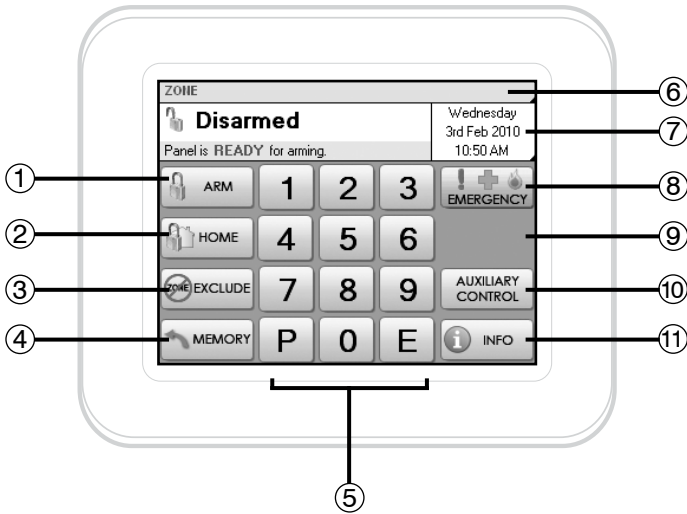

- ① Touch to arm the system. Page 14.
- ② Touch to arm Home Mode. Page 16.
- ③ Touch to Exclude zones. Page 19.
- ④ Touch to view the event memory. Page 20.
- ⑤ Numeric keypad.
- ⑥ Touch to view the full zone list. Page 10.
- ⑦ Touch here to view the calendar. Page 11.  
This area also displays System Alarms. Page 12.
- ⑧ Touch to activate the Emergency Alarms. Page 18.
- ⑨ This area displays current Emergency Alarms.
- ⑩ Touch to control the Auxiliary Outputs. Page 24.
- ⑪ Touch to display the information screens. Page 7.

# Info Screen

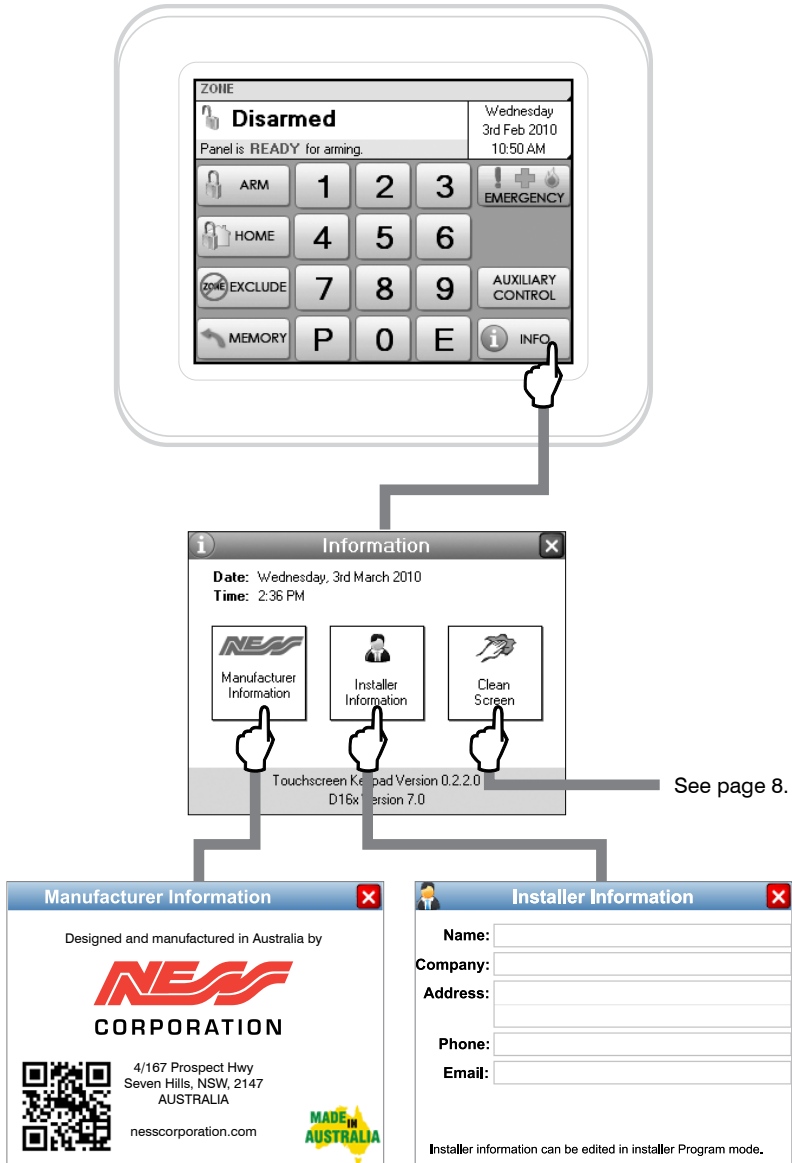

Ness Corporation contact details.

Your installer's contact details are stored here. Never lose a business card again!

# Care & Cleaning

## Caring for your Navigator

Do not use a pen, screwdriver or other sharp implement to press the touch screen. Permanent damage may result and will invalidate any warranties.

Please press lightly, the touch screen does not need heavy force to operate. Pressing too hard may damage the LCD screen and the housing. Navigator responds to every touch with a short beep.




## Cleaning The Touch Screen

Do not clean the touch screen with abrasive cleaners. Navigator's Clean Screen page. While the system is disarmed, press Info, Clean Screen to see the cleaning instructions.

STEP 1. In the disarmed mode, press *Info*.

STEP 2. Press *Clean Screen*.

STEP 3. Press *Start*.



Step 4. The touch screen will be disabled for 10 seconds. Clean the bare screen or the protective film using a soft dry cloth or a cloth moistened with Isopropyl Alcohol. Avoid chemical cleaners and solvents which may damage plastic components.

You have 10 seconds left.

Screen cleaning time has finished.



# Screen Protection


---

## Applying the Protective Film


Navigator Touch Screen Keypad is supplied with a self-adhesive screen protector to help protect the sensitive touch surface from marks and scratches which may appear under normal use.

We highly recommend that you apply the protective film to keep the touch surface looking brand new for years to come.


**STEP 1.** Use the orange No. 1 tab to peel off the self-adhesive backing.

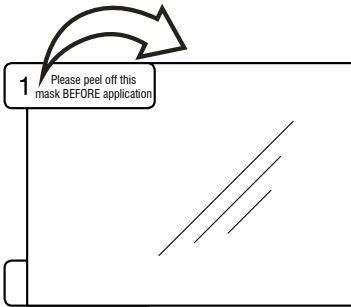

**STEP 2.** Flip the film over to position the green No. 2 tab at the top left.

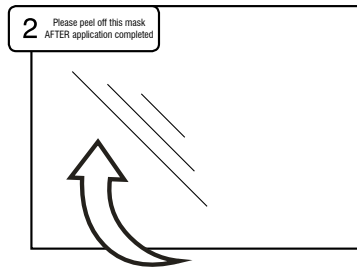


**STEP 3.** Holding the protective film by the green tab, carefully apply the film to the Navigator's screen. Start applying at one end and smooth the film as you go to remove any air bubbles

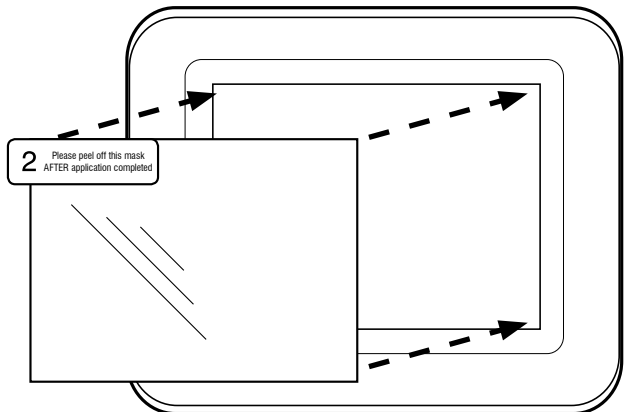

**STEP 4.** Use the green tab to peel off and discard the topmost layer of the film. Your Navigator is now ready for use.

# Zone Status Display

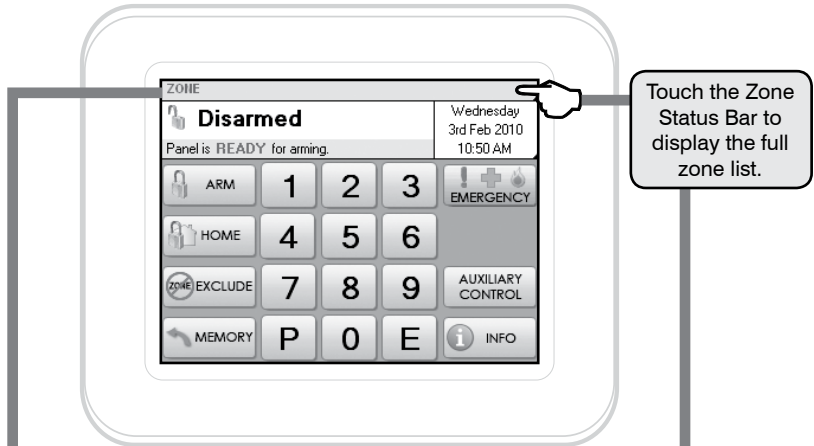

ZONE 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16

The Zone Status Bar displays the zone numbers of unsealed zones.

ZONE 1 - Front Door

If only one zone is unsealed its description will also be displayed.

ZONE 1 - Front Door

Zones which are currently in the alarmed state are displayed in flashing red text.

The zone number and description of all zones.

Unsealed zones show a red indicator.

Zone List		✕
1 - Front Door	9 - Living Room	
2 - Side Door	10 - Dining Room	
3 - Back Door	11 - Rompus Room	
4 - Front Window	12 - Kitchen	
5 - Side Window	13 - Hall	
6 - Back Window	14 - Study	
7 - Bedroom	15 - Bathroom	
8 - Lounge Room	16 - Laundry	
Zone names can be edited in program mode.		

Touch ✕ to close the window.

The Zone List display will show 8 or 16 zones depending on whether your Navigator Control Panel is a D8x or D16x.


Zone names can be customised in program mode. Page 28.

# Clock Display

The date and time are normally displayed when the system is armed or disarmed.


The date and time can be set in User Program Mode, see page 30.

If there is a System Alarm, this area will display the alarm. See next page.

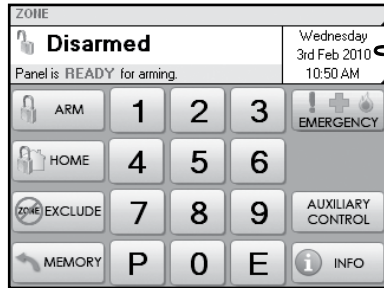

To display the full calendar.


Touch 


Touch  to close the window.



# System Alarm Display


If there is a System Alarm, the clock area will display the alarm. Touch to display details.

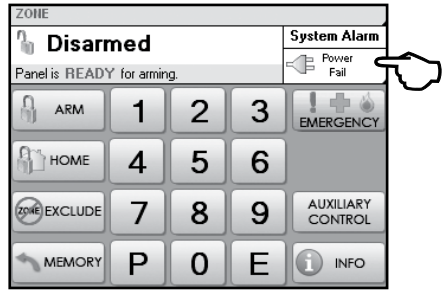

To display System Alarm details.  
Touch  the system alarm area.


Full description of the System Alarm and what action to take.


Outstanding System Alarms shown here.

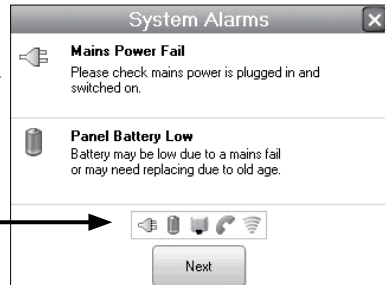

Dialler Communication Fail means your dialler was not able to send an alarm message. This message is usually seen if the panel has not been acknowledged remotely when using Audible Monitoring. See page 36.

Touch Next to view any other System Alarms.

Touch  to close the window.

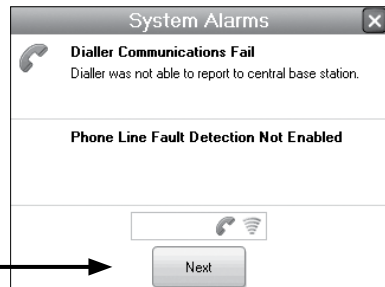


# System Alarm Display

Radio Key low battery alarm.

Radio Tamper alarm indicates that a device such as a Radio Reed Switch or the R12 Radio PIR may have been opened. Check the device.

Radio Supervision, if enabled by your installer, alerts you if a radio device has not transmitted a signal for a set interval. Ask your installer to check the radio device.

External Tamper alarm and Panel Tamper alarms. Check the external siren cover and main panel.

Touch  to close the window.



# To Arm


The control panel must be armed in order to detect intruders.


Before arming, make sure all zones are “sealed” by ensuring there is no movement in rooms covered by motion detectors and that doors or windows protected by reed switches are closed. The display will tell you when the system is ready for arming.


## SIREN WARNING

At the end of the exit time, all zones should be sealed. If any are unsealed, the siren will sound for 2 seconds to indicate that those zones have been automatically excluded. You should disarm the panel, check the premises and then arm again. Continual warnings could mean there is a problem with a detection device - you will have to manually exclude the zone before attempting to arm the system.



If a zone is unsealed at the end of exit time and the auto-exclude option is disabled, the siren will sound for the duration of siren time, (the default is 5 minutes).



 10 beeps on arming means mains power may be turned off or the backup battery is low.

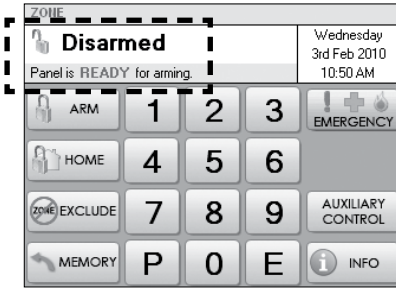
 One long beep when you arm could mean the panel is already armed or the keypad code is wrong, (if not using Shortcut Arming).



**To arm the system.**

Touch  + 

or touch  + *A valid user code.* + 

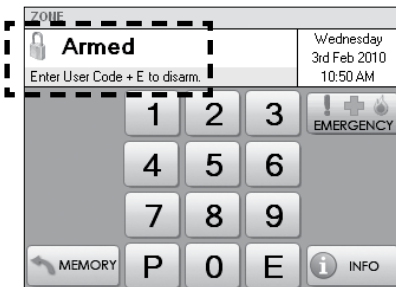

# To Disarm

When you enter the protected premises through a delay zone, the keypad responds with regular beeps<sup>1</sup> as a reminder to disarm.

If the panel is not disarmed by the end of the entry delay time, an alarm will occur.

Using the optional radio keys, you may disarm your system from inside your premises or from just outside.<sup>2</sup>

If you make a mistake when entering your user code, press "E" and start again. Five incorrect entries will cause an alarm.

The panel can be reset and the siren/s silenced by disarming the panel.

If you arrive at your premises and find the strobe light flashing<sup>3</sup> reset the panel as above. To check the cause of the alarm, you can view the alarms in memory by entering Memory Mode.




## ARM ONLY CODES

User codes can optionally be programmed to be Arm Only codes. An Arm Only code can arm the system but it cannot disarm. However if an Arm Only code is assigned to a radio key, the radio key OFF button will arm and disarm.

<sup>1</sup> If Entry Beeps are enabled.

<sup>2</sup> The strobe light will flash to indicate arming and disarming by radio key. Your installer can also enable siren 'Chirps' for an audible indication of radio key operation.

<sup>3</sup> In the event of an alarm, the strobe light will flash for 72 hours or until the panel is reset.

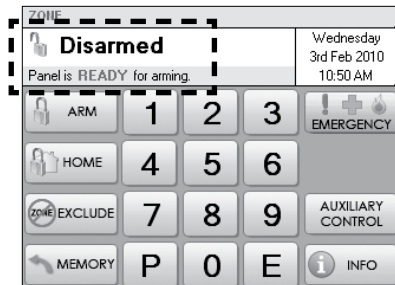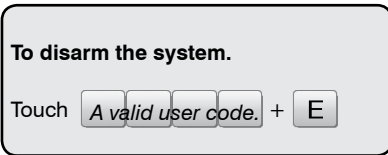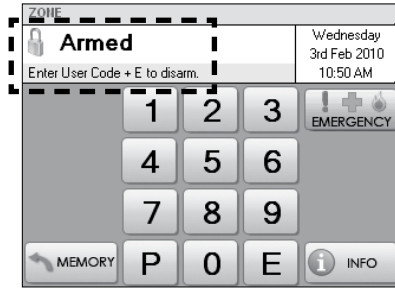

## AUTO RE-ARM

Your panel may be programmed for Auto Re-Arm to help prevent accidental disarming.

Auto Re-Arm checks that you have entered the premises after disarming. If all zones remain sealed for a period as set by the entry delay time then the panel will re-arm. This is most useful when used with radio keys where the OFF button might be accidentally pressed after you have armed and are leaving the premises.

# To Arm Home Mode

Home mode allows you to arm selected zones while others are ignored. Typically, perimeter zones (doors and windows) can be monitored while you are at home.

Your installer must program which zones will be active in Home mode.

If an alarm occurs while in Home mode, entering a valid user code + E will silence the alarm. This will also disarm the panel, so remember to re-arm Home mode again if needed.

Using the optional Radio Keys you can arm Home Mode by pressing either the OFF button or the ON button twice within 4 seconds or by pressing the AUX button, (RK4 radio key only). These options must be enabled by your installer.



Note: Home Mode and Area arming

Home Mode can be used if the panel is fully disarmed or if only Area2 is armed. Home Mode is not available when Area 1 is armed.

The panel can be armed in Home mode if Area2 is already armed on these conditions:

- Area 1 must be OFF.
- Area 2 must be armed first, and then Home Mode armed – not the reverse.
- Zones assigned to both Home mode and to Area 2 will act as Home Mode zones when both Area 2 and Home Mode are armed.

Note: Home Mode arming when Area2 is armed cannot be done by Radio Key or by keyswitch.

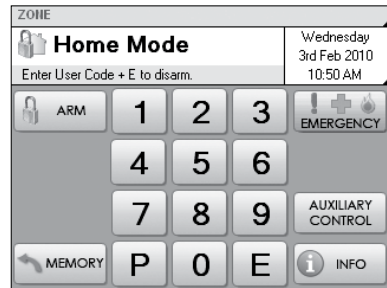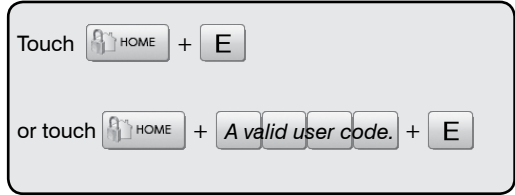

## NOTE

In normal disarmed mode, the Home Mode button HOME is visible only if your installer has enabled Home Mode.



# Keypad Duress Alarm

The DURESS alarm can be used to send a silent alarm to the central station that you are being forced to disarm the panel against your will. That is - you are disarming under "duress."

To disarm and send a DURESS alarm, prefix your User Code with one of the digits 5, 6, 8 or 9 when disarming.

\* The Keypad DURESS is normally not enabled. To enable this function, consult your installer.

\* DURESS alarms can only be used by systems which are monitored by a Central Station.


\* The DURESS alarm can be programmed to sound the internal siren (Reset output). This option is Off by default.

**To trigger the keypad Duress Alarm, add a special digit before your user code when disarming.**

Touch **5** +  +  +  +  + **E**  
*A valid user code.*



*You can precede your user code with any of the digits 5, 6, 8 or 9.*

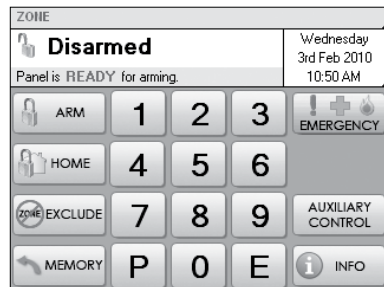

Your system will now be disarmed and a silent Duress alarm is sent to your central monitoring station.

# Emergency Alarms

## PANIC ALARM


The Panic alarm may have been programmed to be either Audible to activate the sirens, or Silent to send a PANIC report by dialler if your system is monitored by a Central Station.

The Emergency Alarm display will show Medical and Fire alarms only if they have been enabled by your installer.


The Medical alarm sends a medical alarm report by dialler if this option has been enabled by your installer and the system is monitored by a central station.

The Medical Alarm does not sound the sirens.

The Fire alarm sounds the siren using the Fire Alarm sound and sends a Fire Alarm report by dialler. If this option has been enabled by your installer and the system is monitored by a central station.

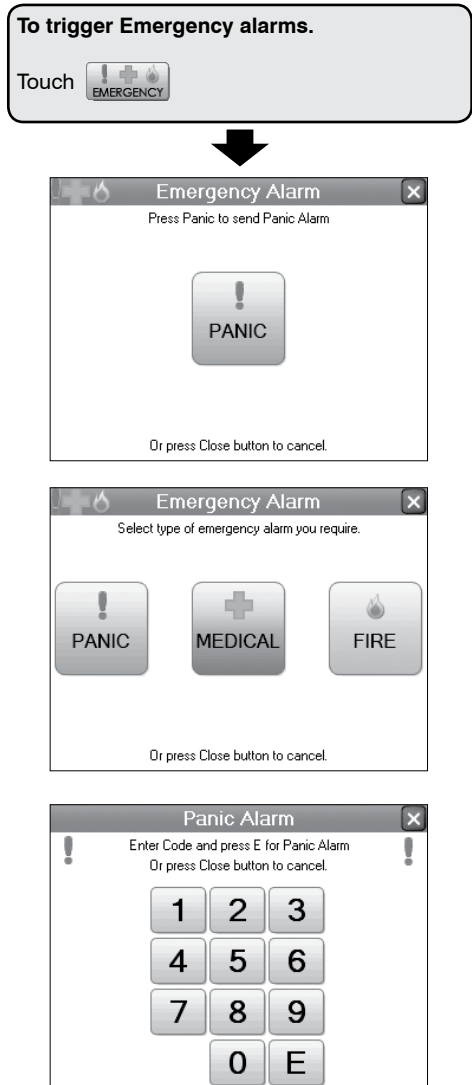

If the Panic Alarm Shortcut is not enabled, you are required to enter your user code + E to trigger the panic alarm.

Touch  to close the window.

# Excluding Zones

If there is a problem with a detection device and the zone cannot be sealed when arming the panel, then that zone can be manually Excluded so that it does not generate alarms.

When zones have been Excluded, the EXCLUDE light flashes continuously while the panel is disarmed and also when armed.


Zones can be excluded while the panel is either disarmed or armed. See notes below.


Zone Exclude is not permanent. Excluded zones are automatically included next time the panel is disarmed.

## To Exclude zones.


Touch 

Then touch the zone name/s to toggle the exclude status for one or more zones.


Excluded zones are indicated by the  icon.

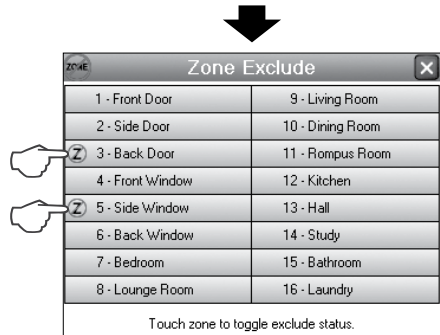

Touch  to close the window.

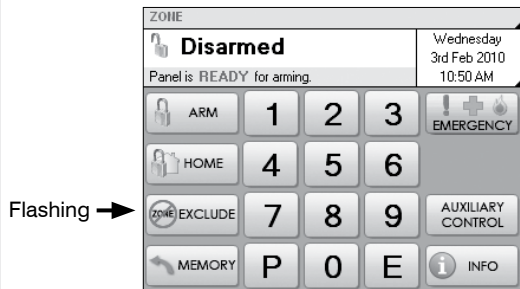

In both disarmed and armed modes, the Zones Excluded icon flashes to indicate that there are zone/s excluded.

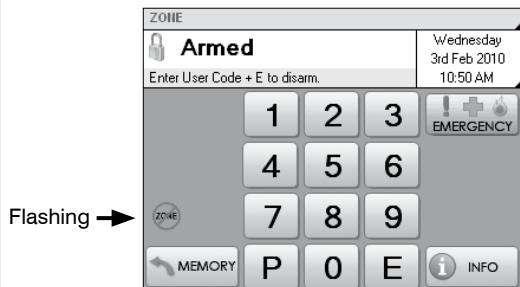

# Event Memory

The panel stores a comprehensive event memory, including Arming, Disarming, Low Battery, Mains Fail and Alarm events.


The memory is constantly upgraded and the last 80 events with time & date are always available for viewing.

This memory display can only be selected while the panel is in the disarmed state.

The MEMORY button flashes continuously when an alarm has occurred as a reminder to view the alarm memory.


Touching the MEMORY button to view the event history also clears the flashing memory alert.

The Event Memory window will close automatically when the last event has been viewed.

Touch  to close the window.

To view the Event memory.

Touch 

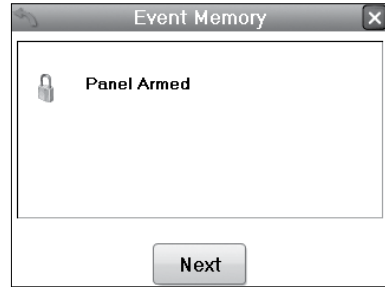


Press Next to view the event memory from most recent to oldest.

 Panic Alarm

Next

 Alarm Zone 1

Next

 Radio Device 10  
Low Battery  
Dining Room

Next

There is no need to refer to charts or tables - the event memory describes exactly what you're viewing, in plain English.

# Day Mode - Set up

Your Navigator control panel has a Temporary Day Zone feature which allows easy and flexible Day Zone selection and operation.

Temporary Day Zones operate in addition to Permanent Day Zones which are usually set up by your installer.

You can easily enable and disable Temporary Day Zones and even program which zones will be Day Zones from the Navigator Touch Screen keypad.

Day Zones can be programmed by your installer to beep the keypad, or briefly sound the siren/s or flash the strobe light, or to sound an optional buzzer.


## TYPICAL APPLICATIONS

Day Zones are useful for a variety of applications such as a shop door beeper triggered by a reed switch on the door.

For example, in a shop situation you can use Day Mode to alert you when a customer enters the front door.

You can also use Temporary Day Zones to monitor switches on, for example, the rear door or the fridge doors.

**Note for installers and advanced users:** Permanent Day Zones are not displayed in selection mode. Permanent Day Zones can be selected as Temporary Day Zones but this has no effect as those zones are already day zones.


Touch  to close the window.

Select which zones will be Temporary Day Zones. You probably will only need to do this once or occasionally.

**To enter Temporary Day Zones selection.**

Touch  + 

Then touch the zone name/s you want to enable or disable as Day Zones.

Selected zones are indicated by the  icon.



# Day Mode - Operation


This enables/disables both Temporary and Permanent Day Zones.

When Day Mode is enabled, any unsealed day zone will sound the programmed output for 2 seconds. When Day Mode is disabled, an unsealed day zone will simply be indicated on the keypad as an unsealed zone.

Day Mode can be enabled when the panel is in the normal disarmed mode.

**To enable Day Mode.**

Touch **0** + **E**

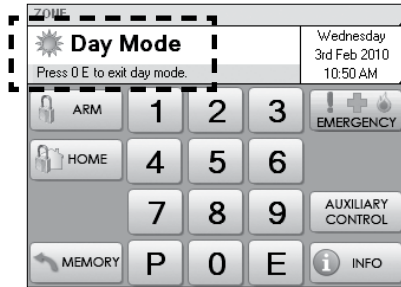


**To disable Day Mode.**

Touch **0** + **E**

# Auto Time


Auto Time - automating your Navigator security system.

Your D8x/D16x Navigator panel features sophisticated automation features making full use of the onboard Real Time Clock and a set of powerful yet simple to program options.



ARM or DISARM AUTOMATICALLY at pre-programmed times of day or day of the week.

Increase site security. No need to rely on staff remembering to arm or disarm the system.



TURN AUX OUTPUTS ON or OFF at pre-programmed times - every day, once a week, any time. Automate doors, sprinkler systems, lights and more.



ENABLE/DISABLE USER CODES depending on the time of day or day of the week. Allows managers to grant users access to the system at selected times and deny after hours entry.

## AUTO TIME WARNING PERIOD

(Optional function - must be enabled by your installer.)

When an Auto Time event is about to begin, your keypad (or keypads) will begin a constant slow beep as a warning that the automatic event is about to happen. The warning beeps can be programmed to start up to 99 minutes prior to the AutoTime event.

Press any key on the keypad to stop the beeps during the warning period. The beeps will start again for the final minute at a faster rate.

**Final Minute beeps.** In the last minute prior to the Auto Time event, the keypad will beep at a faster rate to warn that the event is about to start.

## TO DELAY THE AUTO TIME EVENT

(Optional function - must be enabled by your installer.)

To delay the Auto Time event, enter a valid user code on its own. (The user code must be assigned to an Area to work). This will suspend the warning beeps and the AutoTime event for 1 hour - when the warning process will start again.

Example: Your panel is programmed to Auto Arm at 6pm every weekday and the Warning Period is programmed for 5 minutes. You are working back late and at 5:55pm your keypad begins to beep. Since you're not ready to arm the system yet, enter your user code (without pressing E) at the keypad. The warning beeps will stop and arming will be delayed by one hour. At 6:55pm the warning beeps will start again, followed by automatic arming if you don't delay the event again.

Any AutoTime event can be postponed, not just arming. You can also delay the automatic turn (or off) of one of the AUX outputs in the same manner.

# AUX Outputs - Manual Operation

Manual Operation Of the Aux Outputs (Optional function - must be enabled by your installer.)


As well as automatic operation by Auto Time, the auxiliary outputs can also be operated manually by keypad.

The Auxiliary Output Control screen shows the AUX outputs which have been programmed for keypad control by your installer.


Touch a button to Pulse on or toggle an output. (Pulse or toggle is programmed by your installer.)

**Note. Your panel has 4 x Auxiliary outputs onboard. Auxiliary outputs 5 to 8 are optional depending on availability of the output expander accessory.**

**To operate the AUX outputs.**

Touch 

Auxiliary Control is available in all modes, including when the system is armed.

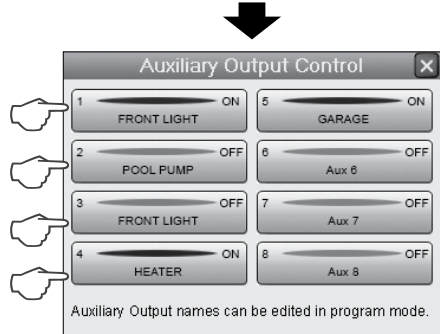

## MANUAL OPERATION AND AUTO TIME SCHEDULES

Manual operation of outputs works in conjunction with AutoTime schedules, if programmed.

For example, if AutoTime has turned an output on as scheduled (say, a light) you can manually turn it off (and back on again) any time you wish. At the scheduled turn OFF time, if the output is still on it will be turned off.



# Programming

---

How to enter program mode . . . . .	26
Set Brightness, Set Volume . . . . .	27
Edit Zone Names, Edit AUX Output Names . . . . .	28
Zone Name Library . . . . .	29
Setting the Real Time Clock . . . . .	30
User Codes Options Table . . . . .	31
User Codes Programming . . . . .	32
Radio Keys Programming . . . . .	33
Timer Programming, Entry/Exit Delays . . . . .	34
Follow Me Telephone Number Programming . . . . .	35

# Programming - How to enter Program Mode

In User Program Mode you can program User Codes, Timers, Real Time Clock, Follow Me Telephone Number.

## USER CODES

The panel has 56 user codes which can be operated by keypad code (3-6 digit PIN), by optional radio key or by optional access cards.

**The factory default Master Code is 123. You should re-program this code with a new code of your own choice.**

## TIMERS

You can also re-program the Entry Delay Time and Exit Delay Time if you need more or less time to exit and enter the premises.

## REAL TIME CLOCK

Some automation features such as AutoTime rely on the onboard Real Time Clock. Set the current date and time to ensure events take place as expected.

You will need to adjust the Hours setting when Daylight Savings starts and ends.


## FOLLOW ME TELEPHONE NUMBER

If your panel is set up for Audible Voice monitoring, you can program the Follow Me Telephone Number to temporarily replace the two installer-programmed phone numbers.

Enter program mode when the panel is in the normal disarmed mode.

**To enter User Program Mode.**

Touch **P** + **Your Master code.** + **E**

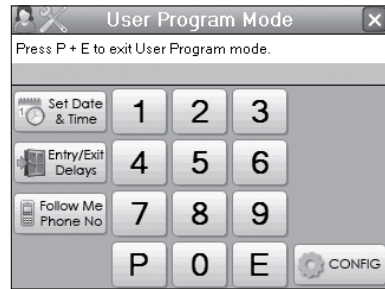

**To exit User Program Mode.**

Touch **P** + **E**

The panel will automatically exit Program Mode if the keypad is inactive for 4 minutes.

# Programming - Navigator Configuration

The Navigator Configuration screen allows you to:

## SET BRIGHTNESS




Adjust the brightness of the Navigator's LCD screen back-lighting to suit the room.

## SET VOLUME


Adjust the beep volume of the Navigator touch screen.

## DEFAULT ALL CONFIG ITEMS

This option deletes your custom settings and returns all configuration options to factory default settings.

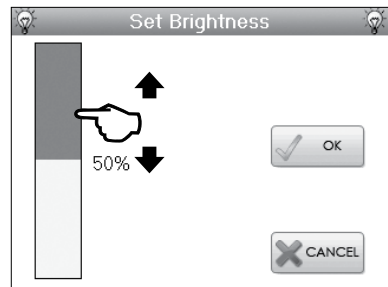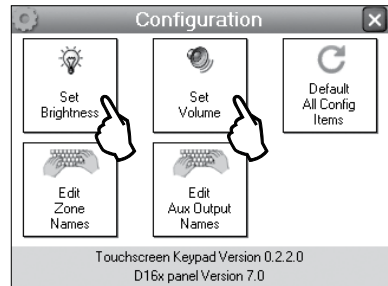

Slide your finger along the Brightness slider to adjust the brightness from 1% to 100%

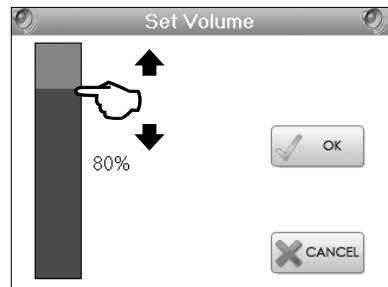

Slide your finger along the Volume slider to adjust the touch screen beep volume from 1% to 100%. The volume cannot be set to zero.

# Programming - Navigator Configuration

## EDIT ZONE NAMES






Edit the zone names to suit your own premises. For example, instead than meaningless numbers, zones can be given names that mean something to you, such as Front Door, Back Door, Lounge Room, etc.



You can choose from a library of common zone names or type your own names using the on screen QWERTY keyboard.

## EDIT AUX OUTPUT NAMES

If your installer has installed automation options, you can edit the names of the auxiliary outputs.

The example opposite shows how to edit Zone Names. Follow the same procedure to edit Aux Output Names.

-  Next/Previous zone
-  Backspace
-  Move cursor Left/Right
-  Opens zone name library
-  To return to the zone list

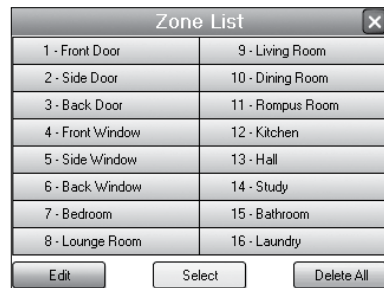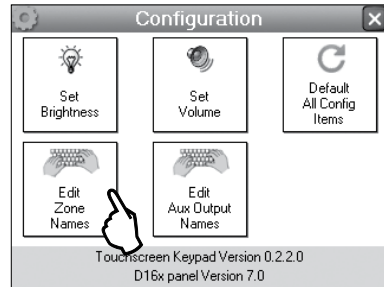

Touch a zone name. If you have a Navigator D8x panel this display will show 8 zones.




Edit the name of the zone.


# Programming - Navigator Configuration


## EDITING ZONE NAMES


Using the Zone Name Library.

 Next/Previous zone

 Backspace

 Move cursor Left/Right

 Opens zone name library

 To return to the zone list

## THE ZONE NAME LIBRARY.

You can use the zone name editor to type the names of all your zones.

To save you time, Navigator Touch keypad has a built-in library of common zone names. You can even choose a zone name from the library and add more text to customise it further.

For example. Choose “Garage” from the library and add “Roller Door” or “Detector” or “Window”.

Zone List	
1 - Front Door	9 - Living Room
2 - Side Door	10 - Dining Room
3 - Back Door	11 - Rompus Room
4 - Front Window	12 - Kitchen
5 - Side Window	13 - Hall
6 - Back Window	14 - Study
7 - Bedroom	15 - Bathroom
8 - Lounge Room	16 - Laundry

Touch a zone name to display the zone name editor.

Edit Zone Names									
Zone 1									
Front Door									
1	2	3	4	5	6	7	8	9	0
Q	W	E	R	T	Y	U	I	O	P
A	S	D	F	G	H	J	K	L	
Z	X	C	V	B	N	M	DEL		
SHIFT	SPACE		Select	<	>				

Touch Select to open the zone name library.

Select Zone Names		
Zone 1		
Lounge Room		
Front Door	Kitchen	Garage
Back Door	Bathroom	Shed
Window	Hallway	Manhole Cover
Bedroom	Rumpus Room	Vibration Sensor
Lounge Room	Study	Smoke Detector
Dining Room	Office	Water Sensor

Choose a pre-defined zone name from the library then press  to close the library.

# Programming the Real Time Clock

This option allows you to program:

DAY OF MONTH (01-31)

MONTH (01-12)

YEAR (10-63)

HOUR (00-23) 24hr time format

MINUTE (00-59)


The Day Of Week does not need to be programmed. It is automatically calculated from the date.

## DATE FORMAT




The date is entered in 24 hour format but is displayed on screen in 12 hour format.

In User Program Mode.

Touch 

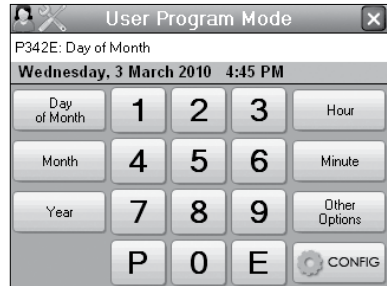






To program.

Touch  +  + 


Touch  +  + 

Touch  +  + 




Touch  +  + 

Touch  +  + 

EXAMPLE: To set the Day Of Month.

Touch 



Enter Day of Month (01-31)   + 

The green status bar will show the new setting.

# Programming User Codes

## USER CODE PROGRAMMING RULES

- Up to 56 Keypad Codes can be used at up to 4 wired Navigator keypads for controlling all panel functions including Arming & Disarming, Home Mode, Panic, memory recall and much more.
- Keypad Codes (or PINs) can be 3 to 6 digits in length and can be individually programmed and deleted.

- User Code 1 is also the Master Code which is used to enter User Program mode.
- User Codes 2 to 56 can be programmed to be Radio Codes or Access Cards as required. Ask your installer.

USER CODE	OPTION NO.	PIN
1 (Master Code)	P201E	123
2	P202E	
3	P203E	
4	P204E	
5	P205E	
6	P206E	
7	P207E	
8	P208E	
9	P209E	
10	P210E	
11	P211E	
12	P212E	
13	P213E	
14	P214E	
15	P215E	
16	P216E	
17	P217E	
18	P218E	
19	P219E	
20	P220E	
21	P221E	
22	P222E	
23	P223E	
24	P224E	
25	P225E	
26	P226E	
27	P227E	
28	P228E	

USER CODE	OPTION NO.	PIN
29	P229E	
30	P230E	
31	P231E	
32	P232E	
33	P233E	
34	P234E	
35	P235E	
36	P236E	
37	P237E	
38	P238E	
39	P239E	
40	P240E	
41	P241E	
42	P242E	
43	P243E	
44	P244E	
45	P245E	
46	P246E	
47	P247E	
48	P248E	
49	P249E	
50	P250E	
51	P251E	
52	P252E	
53	P253E	
54	P254E	
55	P255E	
56	P256E	

# Programming User Codes

The option number and the current user code is displayed.


Note 1. User codes must NOT start with zero. (The panel will allow codes beginning with zero to be programmed but they will not operate the panel. This is an alternative method for disabling user codes.)

Note 2. All codes must be unique to each other. Codes are rejected if already used. Some codes that are similar to existing codes may also be rejected.

Touch to delete a user code.

In User Program Mode.  
Refer to the User Code options table on page 31 then enter the option number of the user code you want to program.

Touch **P** +    + **E**  
*3 digit option number*




Now enter your new user code (PIN). The code can be 3 to 6 digits in length.

Touch  *Your new PIN* + **E**

Then enter the PIN again to confirm.

Touch  *Your new PIN* + **E**

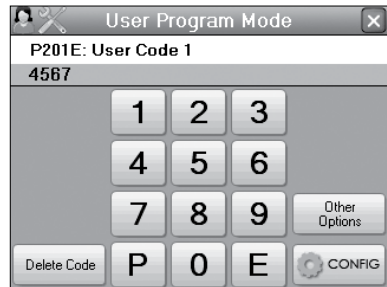

The new user code will be displayed.



## ARM ONLY CODES



If a code has been programmed by your installer to be an Arm Only code, then that user code can arm but not disarm the panel. This is handy for cleaners, temporary staff etc.



# Programming Radio Keys

Each of the User Codes, except for the Master Code, can be programmed to be Radio Codes.

This allows up to 55 Ness Radio Keys to be used for arming and disarming of the panel.

The optional Ness Radio Interface is required for radio operation. Ask your installer.

Indicates that this code has been enabled as a Radio Code. If the option has been enabled by your installer.

Touch to delete a Radio Key.

The green status bar will indicate that the Radio Key was successfully programmed.

If you hear a long beep, the Radio key may already be programmed at another user code.

In User Program Mode.

Refer to the User Code options table on page 31 then enter the option number of the user code you want to program.

Touch **P** +    + **E**  
*3 digit option number*  
*Example, P203E*

The screenshot shows a window titled 'User Program Mode' with a close button. Below the title, it displays 'P203: User Code 3'. A status bar indicates 'Radio Key Not Programmed'. There is a 'Program Radio Code' button with a checkmark and a 'Ready to Receive Radio Code' indicator. A numeric keypad (1-9, 0) is visible. At the bottom, there are buttons for 'Delete Code', 'P', '0', 'E', and 'CONFIG'.

Touch **Program Radio Code**

The display will show  Ready to Receive

Press the disarm button on your Ness Radio Key (or the No. 1 button).

The image shows a black radio key with several buttons. A white hand icon points to the top button, which is the disarm button.

The screenshot shows the same 'User Program Mode' window. The status bar now indicates 'Radio Key Programmed'. The 'Program Radio Code' button is now disabled, and the 'Ready to Receive Radio Code' indicator is present. The rest of the interface remains the same.

# Programming Timers

This option allows you to program:


**ENTRY DELAY TIME 1 (01-99 sec)**  
Entry Delay Time 1 sets the time allowed to enter the premises through a delay zone.


**ENTRY DELAY TIME 2 (01-990 sec)**  
If enabled by your installer, this timer is used to give extra long entry delay on selected zones. Entry Delay Time 2 is internally multiplied by 10. For example, enter 12 to get a time of 120 seconds.

**EXIT DELAY TIME (01-99 sec)**  
Exit Delay Time sets the time allowed to exit the premises after arming. All zones, except 24hr zones, are inactive during the Exit Delay Time.



The option number and the current delay time is displayed.

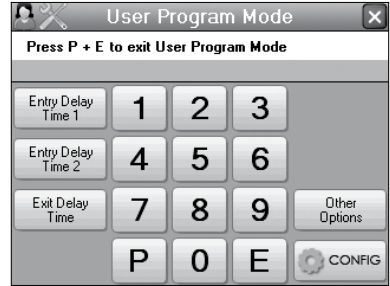

The new delay time is displayed.



In User Program Mode.  
Touch 




To program.


Touch  +  + 


Touch  +  + 


Touch  +  + 

**EXAMPLE: To set Entry Delay Time 1.**

Touch 



Enter the new delay (01-99)  + 



# Programming - Follow Me Telephone Number

This option allows you to program:


## FOLLOW ME TELEPHONE NUMBER

If your panel is set up for Audible Voice monitoring, you can program the Follow Me Telephone Number to temporarily replace the two installer-programmed phone numbers.

If the Follow Me Telephone Number is blank the panel will report alarms to the Primary and Secondary phone numbers if they have been programmed by your installer.

Use the Pause, star or hash keys to enter special characters if required. For example, if your phone system requires you to dial zero to pick up the line, press 0 followed by the Pause button then enter the phone number you want the panel to dial in the event of an alarm.

The option number and the current phone number is displayed.

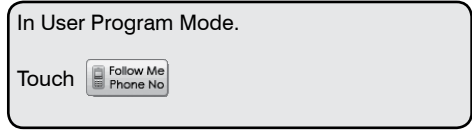

# Monitoring

## CENTRAL STATION MONITORING



ing Station.

The digital messages can include information about the zone or zones which caused the alarm, tamper alarms, low battery or

mains failure reports, and it can also (by user number) identify the users who arm and disarm the system.

Central station monitoring is highly recommended and is the most effective method of monitoring your alarm system.

For further information about 24 hour monitoring, contact your installer or Ness Corporation.

## Audible Voice Monitoring - Enhanced

D8x/D16x version 8.0 and later has enhanced audible monitoring features using an onboard library of voice messages to deliver clear and concise spoken word alarm messages to the recipient's mobile phone or landline.

Audible messages are detailed and interactive, with spoken word messages clearly stating the alarm condition being reported. The user can then acknowledge the alarm and hang up or enter a remote control menu which gives options to arm and disarm the system, control auxiliary outputs and even exclude zones - all over the phone.

### ALARM MESSAGE TRANSMISSION

Alarm reports are sent to the Primary (P70E) and Secondary (P71E) telephone numbers or only to the Follow Me phone number (P00E) if programmed.

### ALARM MESSAGE FORMAT

The alarm message starts with the introduction:

🔊 This is a security system message. To start the report press 1.

*The recipient must press 1 on their phone. If not, the message repeats.*

🔊 [System Name] security system reports the following

*System Name is programmed by option P198E*

🔊 [Alarm or Message] (See the Voice Messages table)

🔊 Wait to hear the report again, or to continue, press 1.

*Press 1 on your phone. More alarm reports, if any, are heard.*

Once all alarms have been acknowledged.

🔊 End of messages. To control the security system press 2 then, after the tone press 2 again. To acknowledge and end, press STAR then press HASH and then hang up the phone.

Press STAR then HASH **\*** **#** on your phone to hang up.

Press 2 then 2 **2** **2** to continue to the telephone remote control menu.

# Telephone Remote Operation for V8.0 and later

---

## TO CONNECT TO THE PANEL BY TELEPHONE

METHOD 1. The connection is initiated by the panel during an alarm message.

METHOD 2. The connection is initiated by the user phoning the panel.

## HOW TO INITIATE TELEPHONE REMOTE CONTROL

1. Phone the panel telephone number and listen for the required number of rings (the normal double ring is counted as one ring) and then hang up.
2. Wait 10 seconds and then call the number again within 50 seconds.
3. The panel will answer the second call immediately and respond with an audible tone similar to a fax tone.
4. Press the **2** button on your telephone to start the session.
5. Listen to the voice prompts for instructions.
6. When you're done, press **\*** **#** on your phone to hang up.

Remote operation allows:

1. Control of Arming/Disarming, AUX1 to AUX4 and Zone Excludes.
2. Voice updates on Arming state, Zone alarm and excluded state, warning states.

Prompts would be issued when one of these is changed.

## OPERATION

Example:


When the user calls the panel using the accepted methods and after the panel stops sending the answer tone sequence.

The user first presses key 2 and the panel starts the voice prompt:


 This is your SECURITY SYSTEM.

To control the security system press STAR, then enter your USER code, then press HASH.

If the user does this correctly - the voice prompt continues:

 To arm or disarm the system press 1. To control OUTPUTS press 2. To exclude or include a zone press 3. To listen to reports press 4. To hang up press STAR then PRESS HASH.

The user presses 1 to arm or disarm the system and the voice prompt continues:

 To arm, Press 1. To disarm, Press 2. To return, Press STAR.

The user presses 1 to arm and the voice prompt continues with either of these messages:

## EITHER

(assuming Area 1 was disarmed and that Area 2 is not remote armed)

Continued next page...

# Telephone Remote Operation

---

🔊 Area 1 armed, Area 2 disarmed, To arm or disarm the security system press 1.

To control OUTPUTS press 2. To exclude or include a zone press 3. To listen to reports press 4. To hang up press STAR then press HASH.

OR

(assuming Area 1 was already armed)

🔊 Invalid entry. To arm or disarm the security system press 1. To control OUTPUTS press 2. To exclude or include a zone press 3. To listen to reports press 4. To hang up press STAR then press HASH.

The user presses 2 to control outputs and the voice prompt continues with the message:

🔊 Double press the selected auxiliary output 1 to 8. Then press STAR to activate or HASH to turn off the selected output. Press STAR to return.

The user presses 33 STAR \* and the voice prompt continues:

🔊 Auxiliary 3 ON

The user presses 33 HASH # and the voice prompt continues:

🔊 Auxiliary 3 OFF

The user presses 32 HASH (#) (Note that this is an incorrect sequence) and the voice prompt continues:

🔊 To arm or disarm the security system press 1. To control OUTPUTS press 2. To exclude or include a zone press 3. To listen to reports press 4. To hang up press STAR then press HASH.

Press STAR then HASH [\*] [#] on your phone to hang up.

# Troubleshooting

SYMPTOM	POSSIBLE CAUSE	REMEDY
When arming, a zone light is on or the keypad gives a long beep.	One or more detection device (a PIR or reed switch) may be <i>unsealed</i> .	Find the cause of movement or close the door or window.
<ul style="list-style-type: none"> <li>• 10 beeps from keypad.</li> <li>• MAINS light is flashing.</li> <li>• BATTERY light is flashing.</li> </ul>	The mains power may be off, ...or the panel's backup battery may be low, ...or a Radio Device battery may be low.	Make sure the plug pack is plugged in and the power point is turned on. The backup battery may need replacing, call your installer.
1 long beep from the keypad.	Invalid keypad entry.	Press the E button and try again.
2 second siren at the end of Exit Delay time.	A zone was <i>unsealed</i> at the end of exit delay time.	Disarm the panel and check all zones.
The strobe light is flashing.	There has been an alarm within the last 72 hours.	Reset the alarm by disarming the panel and check the Alarm Memory
Siren sounds while the panel is disarmed.	A 24 hour zone has been alarmed. (Siren Tamper, Box Tamper, Panic Button).	Reset the alarm by disarming the panel and call your installer.
EXCLUDE is flashing.	A zone/s has been Excluded.	This is to indicate that one or more zones have been Excluded.
Cannot arm and EXCLUDE is displayed.	You are in Exclude mode.	Press E to exit Exclude mode.
System Alarm TAMPER ALARM is flashing	The 24 hour Tamper input has alarmed. (Siren tamper or box tamper).	Call your installer.
MEMORY is flashing.	There are alarms in memory.	To clear the ALARM MEMORY, view the Alarm memory otherwise the light will clear next time you arm the panel.
Cannot enter Program Mode.	The panel is armed.  Or you may be attempting to enter program mode using one of the user codes.	Disarm the panel before attempting to enter Program Mode.  Try again using the Master Code.
When I arm by radio key, ARMED on the keypad does not turn on immediately.	The panel is waiting 5 seconds for a second press of the ON button to enter Home mode.	This is normal operation when arming of Home mode by radio key is enabled.
The keypad is making a continuous slow beep.	This is the AutoTime warning beep which can be programmed to start from 1 to 99 minutes before an AutoTime event is due to begin.	The beeps will continue during the AutoTime warning period changing to faster beep in the final minute prior to the AutoTime event.
The panel re-arms itself a short time after disarming.	Auto Re-Arm is enabled.	Enter the premises after disarming. Auto Re-Arm is designed to re-arm the panel if you don't enter the premises after disarming.



# NAVIGATOR

- Navigator D8x panel
- Navigator D16x panel

DATE PURCHASED:	DATE INSTALLED:
INSTALLATION COMPANY:	
TELEPHONE:	
MONITORING COMPANY:	
TELEPHONE:	

### TIMERS

ENTRY DELAY TIME 1	<input style="width: 100%;" type="text"/>	Seconds
ENTRY DELAY TIME 2	<input style="width: 100%;" type="text"/>	Seconds
EXIT DELAY TIME	<input style="width: 100%;" type="text"/>	Seconds
SIREN TIME	<input style="width: 100%;" type="text"/>	Minutes

### ZONE ASSIGNMENT

Installer programming options

- P41E ENTRY DELAY 1
- P43E ENTRY DELAY 2
- P42E HANDOVER
- P40E INSTANT
- P45E AREA 1
- P46E AREA 2
- P51E MONITOR
- P52E 24 HOUR
- P54E RESET OUTPUT
- P55E STROBE OUTPUT
- P56E SONALERT OUTPUT
- P57E SIREN OUTPUT
- P74E Report (dialler)

ZONES	DEVICE TYPE	PIR, Reed switch, etc	DESCRIPTION	P41E	P43E	P42E	P40E	P45E	P46E	P51E	P52E	P54E	P55E	P56E	P57E	P74E
D8 & D16	1		Entrance, bedroom1, etc													
	2															
	3															
	4															
	5															
	6															
	7															
	8															
D16	9															
	10															
	11															
	12															
	13															
	14															
	15															
	16															

USER CODE	OPTION No	Extra Options Assigned E.g. Radio Code, Arm Only, etc.
1	Master Code	P201E
2		P202E
3		P203E
4		P204E
5		P205E
6		P206E
7		P207E
8		P208E
9		P209E
10		P210E
11		P211E
12		P212E
13		P213E
14		P214E
15		P215E
16		P216E
17		P217E
18		P218E
19		P219E

USER CODE	OPTION No	Extra Options Assigned E.g. Radio Code, Arm Only, etc.
20		P220E
21		P221E
22		P222E
23		P223E
24		P224E
25		P225E
26		P226E
27		P227E
28		P228E
29		P229E
30		P230E
31		P231E
32		P232E
33		P233E
34		P234E
35		P235E
36		P236E
37		P237E
38		P238E

USER CODE	OPTION No	Extra Options Assigned E.g. Radio Code, Arm Only, etc.
39		P239E
40		P240E
41		P241E
42		P242E
43		P243E
44		P244E
45		P245E
46		P246E
47		P247E
48		P248E
49		P249E
50		P250E
51		P251E
52		P252E
53		P253E
54		P254E
55		P255E
56		P256E