

HIKVISION

DS-KIS203T Four-Wire Analog Bundle

104-102B





Key Feature

- Water Proof Analog Kit for villa or house, only one call button
- Kit including DS-KB2421T-IM and DS-KH2220, 5-meter 4-wire cable, and other accessories
- European power supply adaptor included (please mark for other standards when you order)


Specification

Door station	
Resolution	1920 × 1080
Lens	1/2.7" CMOS
FOV	Horizontal: 66.2°, Vertical: 37.2°
Door station	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Door station	
I/O output	1 relay output
Four-wire	1-ch video input, 1-ch audio input/output,
	1-ch power supply, 1-ch grounding
Door station	
Power supply	12 VDC
Power	Max. 5W
consumption	
Working	-10° C to + 55° C (14° F to 131° F)
temperature	
Working	10% to 90%
humidity	

Dimensions	128 mm \times 42 mm \times 24.8 mm
Indoor station	
Operation method	Physical button
Туре	7-inch colorful TFT LCD
Resolution	800 × 480
Indoor station	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
Indoor station	
Power supply	12 VDC
Power consumption	≪5 W
Working temperature	-10° C to + 55° C (14° F to 131° F)
Working humidity	10% to 90%
Dimensions (W \times H \times D)	195.8 mm \times 132.8 mm \times 18.39 mm (7.7" \times 5.2" \times 0.7")



Dimensions

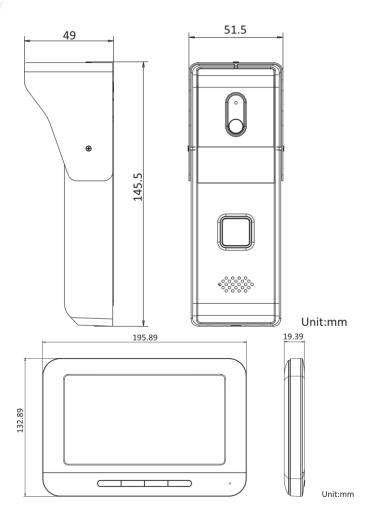

ORDERING INFORMATION

104-102B

Hikvision DS-KIS203T Analogue Intercom Kit

